## sensoryco.

see. feel. smell. real.

SensoryCo's SmX-4DT aroma system provides a method of placing smells directly in a target area instantaneously. With the capability of delivering up to 3 simultaneous aromas per Chamber Module, we integrate seamlessly to outside triggers such as motion sensors, pressure plates, open/close sensors, etc. to launch scents with pre-programmed timing and intensities.

Individual aromas are chambered and released upon outside triggers integrated via relay contact closure. Each chamber is pre-configured to release at varying intensities and for varying lengths based on Remote Valve and 4DT Controller settings. All you need to do is set up your triggers to close contacts at the desired time and we do the rest.

The system uses dry aroma delivery versus atomized oils that fall out and deposit or cause damage to electrical components. Aroma media is contained in SensoryCo SOCs and easily changed out when depleted or when content changes.

The SensoryCo SmX-4DT system uses our proprietary nozzle design that allows for a clean integration to a variety of physical props, structures or environments.


SmX-4D aroma ports

## SmX-4DT

## for Triggered FX

Specifications	
Aroma Capacity:	Up to 3 simultaneous aromas per Chamber Module
Aroma Consumption:	200 hours continuous (*average depends on conditions)
No. of Ports:	1- 3 Remote Valves Up to 25 aroma ports per Remove Valve 25 aroma ports max systemwide
Timer Range:	Wide range available. Standard setting: 1 sec - 60 sec -or- 1 min - 60 min
Key Features:	Easy integration Targeted release Compressed air canister or air compressor delivery
Media:	High Intensity Infused Pearl Bead Socs
Delivery:	Dry aroma delivery, no atomized oils
SmX-4D Controller Dimensions:	20" h x 18" w x 8" d 508 mm h x 457 mm w x 203 mm d
Chamber Module Dimensions:	28" h x 20" w x 8" d 711 mm h x 508 mm w x 203 mm d
	7 1 1 11111 11 X 300 11111 W X 203 11111 U
Input Power:	120 VAC
Input Power: Power Consumption:	
•	120 VAC
Power Consumption:	120 VAC 120 Watts



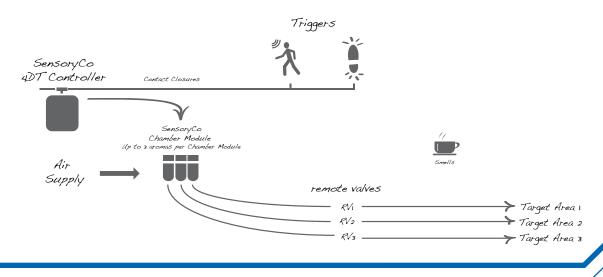

www.snellreal.com